

JAPANESE PATENT OFFICE (JP)
 PATENT KOKAI [LAID-OPEN] PUBLICATION (A)
 PATENT KOKAI NO. HEI 4[1992]-184429

Int. Cl. ⁵	ID Codes	Sequence	Nos. for Office Use
G 03 B 21/14	A		7316-2K
G 02 B 5/30			7724-2K
27/10			7036-2K
27/28	Z		9120-2K
G 03 B 21/00	Z		7316-2K
G 09 F 9/00	360		6447-5G
9/35			7926-5G
H 04 N 5/74	A		7205-5C

Patent Application No. : Hei 2[1990]-315406

Patent Application Date : November 20, 1990

No. of Inventions : 5 (Total 5 pages in Japanese original)

Examination Request : Not requested

TITLE: POLARIZING LIGHT SOURCE DEVICE, AND PROJECTION-TYPE
 LIQUID CRYSTAL DISPLAY DEVICE USING THE SAME

Inventor(s) and address(es): Tadaaki NAKAYAMA
 c/o Seiko Epson Kabushiki
 Kaisha,
 3-5, 3-chome, Yamato,
 Suwa-shi, Nagano-ken

Applicant(s) and address(es): Seiko Epson Kabushiki Kaisha
 4-1, 2-chome, Nishi Shinjuku,
 Shinjuku-ku, Tokyo

Agent(s): Kisaburo SUZUKI, patent agent
 Includes one other.

Amendments: There are no amendments to this patent.


[note: All names, addresses, company names, and brand names
 are translated in the most common manner. Japanese language
 does not have singular or plural words unless otherwise
 specified with numeral prefix or general plurality suffix.
 translator's note]

TITLE OF THE INVENTION: Polarizing light source and projection type liquid crystal display device using the same,

CLAIMS

(1) According to a polarizing light source device that mainly consists of a light source lamp, a parabolic reflector that reflects radiated lights from said light source lamp, and a polarized light separator that separates nonpolarized lights discharged from light source device to two polarized lights which are mutually in orthogonal relationship, a polarizing light source device has characteristics as such that of said two polarized lights which are mutually in orthogonal relationship and are separated from said polarized light separator, one is converged on a light source lamp, and then, is utilized again as lights of light source.

(2) The polarizing light source device according to the claim item 1, wherein said polarized light separator uses dielectric multi-layer films to construct one of said two linear polarized lights, which are in mutually in orthogonal relationship and are included in lights of light source which enter said polarized light separator, to reflect toward light source side.

(3) The polarizing light source device according to the claim item 1 or 2, wherein surface of light emitting tube of said light source lamp shows a frost form with fine concaves and convex ().

(4) The polarizing light source device according to the claim item 1 or 2, wherein surface of light emitting tube of said light source lamp is formed of a smooth glass material; and in addition, a $1/4$ wavelength panel is arranged between said light source device and said polarized light separator.


(5) According to a projection type liquid crystal display device that mainly consists of a light source device that discharges almost parallel luminous flux, a colored light separator that separates said almost parallel luminous flux to three primary color lights, a liquid crystal light valve that modulates each primary color light, a colored light synthesizer that synthesizes each modulated light, and a projection lens that enlarges and projects synthesized modulated lights, a projection type liquid crystal display device has characteristics as such that said light source device is the polarizing light source device according to the claim items 1, 2, 3, or 4.

TITLE OF THE INVENTION: Polarizing light source and projection type liquid crystal display device using the same,

CLAIMS

(1) According to a polarizing light source device that mainly consists of a light source lamp, a parabolic reflector that reflects radiated lights from said light source lamp, and a polarized light separator that separates nonpolarized lights discharged from light source device to two polarized lights which are mutually in orthogonal relationship, a polarizing light source device has characteristics as such that of said two polarized lights which are mutually in orthogonal relationship and are separated from said polarized light separator, one is converged on a light source lamp, and then, is utilized again as lights of light source.

(2) The polarizing light source device according to the claim item 1, wherein said polarized light separator uses dielectric multi-layer films to construct one of said two linear polarized lights, which are in mutually in orthogonal relationship and are included in lights of light source which enter said polarized light separator, to reflect toward light source side.

(3) The polarizing light source device according to the claim item 1 or 2, wherein surface of light emitting tube of said light source lamp shows a frost form with fine concaves and convex ().

(4) The polarizing light source device according to the claim item 1 or 2, wherein surface of light emitting tube of said light source lamp is formed of a smooth glass material; and in addition, a $1/4$ wavelength panel is arranged between said light source device and said polarized light separator.

(5) According to a projection type liquid crystal display device that mainly consists of a light source device that discharges almost parallel luminous flux, a colored light separator that separates said almost parallel luminous flux to three primary color lights, a liquid crystal light valve that modulates each primary color light, a colored light synthesizer that synthesizes each modulated light, and a projection lens that enlarges and projects synthesized modulated lights, a projection type liquid crystal display device has characteristics as such that said light source

JAPANESE PATENT OFFICE (JP)
 PATENT KOKAI [LAID-OPEN] PUBLICATION (A)
 PATENT KOKAI NO. HEI 4[1992]-184429

Int. Cl. ⁵	ID Codes	Sequence	Nos. for Office Use
G 03 B 21/14	A		7316-2K
G 02 B 5/30			7724-2K
27/10			7036-2K
27/28	Z		9120-2K
G 03 B 21/00	Z		7316-2K
G 09 F 9/00	360		6447-5G
9/35			7926-5G
H 04 N 5/74	A		7205-5C

Patent Application No. : Hei 2[1990]-315406

Patent Application Date : November 20, 1990

No. of Inventions : 5 (Total 5 pages in Japanese original)

Examination Request : Not requested

TITLE: POLARIZING LIGHT SOURCE DEVICE, AND PROJECTION-TYPE
 LIQUID CRYSTAL DISPLAY DEVICE USING THE SAME

Inventor(s) and address(es): Tadaaki NAKAYAMA
 c/o Seiko Epson Kabushiki
 Kaisha,
 3-5, 3-chome, Yamato,
 Suwa-shi, Nagano-ken

Applicant(s) and address(es): Seiko Epson Kabushiki Kaisha
 4-1, 2-chome, Nishi Shinjuku,
 Shinjuku-ku, Tokyo

Agent(s): Kisaburo SUZUKI, patent agent
 Includes one other.

Amendments: There are no amendments to this patent.

[note: All names, addresses, company names, and brand names are translated in the most common manner. Japanese language does not have singular or plural words unless otherwise specified with numeral prefix or general plurality suffix. translator's note]

DETAILED EXPLANATION OF THE INVENTION

[Field of industrial application]

This invention relates to a projection type liquid crystal display device that enlarges and displays projected image that is input to a liquid crystal panel; or a polarizing light source device that utilizes projection type liquid crystal display device.


[Prior art]

As illustrated in Figure 2, conventional projection type liquid crystal display device mainly consists of a light source device (201), a light valve comprising polarization panels (202), (205), and a liquid crystal panel (204), and a projection lens (206); and nonpolarized light (207) from light source device is directly polarized at polarization panel (202) and enters liquid crystal panel (204), and is detected with the polarization panel (205) and becomes luminous flux including projected image information; and this is enlarged and projected by the projection lens (206). As explained above, according to the conventional method that takes out linear polarized lights from lights of light source is generally conducted by taking out linear polarized lights with high polarization degree by entering nonpolarized lights from the light source device directly into a polarization plate.

[Subjects solved by this invention]


According to said prior art, when quantity of light is increased in order to brighten a display screen, temperature of polarization panel and a liquid crystal panel that is arranged nearby increases significantly; and therefore, performance degradation of polarization panel and characteristics changes of liquid crystal panel tend to occur. In order to prevent this, as shown with a cooling fan (203) in Figure 2, problem point of prior art is as such that a high capacity cooling is required. In addition, it also shows a problem point that of the two linear polarized lights which are in mutually in orthogonal relationship and are included in lights of light source, one of them is discarded through an absorption by the polarization panel to show a very poor efficiency. This invention is designed to solve these problem points; and its purpose is to offer a projection type liquid crystal display device that provides easy cooling of liquid crystal light valve, and above all, it provides a bright display screen with high utilization efficiency of lights of light source.

[Measures used to solve the subjects]

According to the polarizing light source device of this invention, it shows characteristics as such that mainly consists of a light source lamp, a parabolic reflector that reflects lights radiated from said light source lamp, and a polarized light separator that separates nonpolarized lights discharged from the light source device into two polarized lights in mutual orthogonal relationship; and of the two polarized lights in mutual orthogonal relationship which are separated by said polarized light separator, one is directly discharged to be utilized while the other is converged on a light source lamp, and then, is utilized as lights of light source . Furthermore, said polarized light separator shows characteristics as such that is constructed in such manner so one of the two linear polarized lights in mutual orthogonal relationship and are included in lights of light source which enter said polarized light separator through use of dielectric multi-layer films is reflected toward light source side. In addition, method of conversion of polarized light that is returned to a light source lamp to other polarized light has characteristics as such that is conducted through arrangement of surface of light emitting tube of light source lamp as a frost form with fine concaves and convex (, or to form light emitting tube of light source lamp with a glass material showing smooth surface to place a $1/4$ wavelength panel between said light source device and said polarized light separator.

In addition, the projection type liquid crystal display device of this invention has characteristics as such that mainly consists of a light source device that discharges almost parallel luminous flux, a colored light separator that separates said almost parallel luminous flux to three primary colored lights, a liquid crystal light valve that modulates each primary color, a colored light synthesizer that synthesizes each modulated light, and a projection lens that enlarges and projects synthesized modulated lights; and said light source device is of said polarized light source device.

[Measures used to solve the subjects]

According to the polarizing light source device of this invention, it shows characteristics as such that mainly consists of a light source lamp, a parabolic reflector that reflects lights radiated from said light source lamp, and a polarized light separator that separates nonpolarized lights discharged from the light source device into two polarized lights in mutual orthogonal relationship; and of the two polarized lights in mutual orthogonal relationship which are separated by said polarized light separator, one is directly discharged to be utilized while the other is converged on a light source lamp, and then, is utilized as lights of light source . Furthermore, said polarized light separator shows characteristics as such that is constructed in such manner so one of the two linear polarized lights in mutual orthogonal relationship and are included in lights of light source which enter said polarized light separator through use of dielectric multi-layer films is reflected toward light source side. In addition, method of conversion of polarized light that is returned to a light source lamp to other polarized light has characteristics as such that is conducted through arrangement of surface of light emitting tube of light source lamp as a frost form with fine concaves and convex (, or to form light emitting tube of light source lamp with a glass material showing smooth surface to place a $1/4$ wavelength panel between said light source device and said polarized light separator.

In addition, the projection type liquid crystal display device of this invention has characteristics as such that mainly consists of a light source device that discharges almost parallel luminous flux, a colored light separator that separates said almost parallel luminous flux to three primary colored lights, a liquid crystal light valve that modulates each primary color, a colored light synthesizer that synthesizes each modulated light, and a projection lens that enlarges and projects synthesized modulated lights; and said light source device is of said polarized light source device.

DETAILED EXPLANATION OF THE INVENTION

[Field of industrial application]

This invention relates to a projection type liquid crystal display device that enlarges and displays projected image that is input to a liquid crystal panel; or a polarizing light source device that utilizes projection type liquid crystal display device.

[Prior art]

As illustrated in Figure 2, conventional projection type liquid crystal display device mainly consists of a light source device (201), a light valve comprising polarization panels (202), (205), and a liquid crystal panel (204), and a projection lens (206); and nonpolarized light (207) from light source device is directly polarized at polarization panel (202) and enters liquid crystal panel (204), and is detected with the polarization panel (205) and becomes luminous flux including projected image information; and this is enlarged and projected by the projection lens (206). As explained above, according to the conventional method that takes out linear polarized lights from lights of light source is generally conducted by taking out linear polarized lights with high polarization degree by entering nonpolarized lights from the light source device directly into a polarization plate.

[Subjects solved by this invention]

According to said prior art, when quantity of light is increased in order to brighten a display screen, temperature of polarization panel and a liquid crystal panel that is arranged nearby increases significantly; and therefore, performance degradation of polarization panel and characteristics changes of liquid crystal panel tend to occur. In order to prevent this, as shown with a cooling fan (203) in Figure 2, problem point of prior art is as such that a high capacity cooling is required. In addition, it also shows a problem point that of the two linear polarized lights which are in mutually in orthogonal relationship and are included in lights of light source, one of them is discarded through an absorption by the polarization panel to show a very poor efficiency. This invention is designed to solve these problem points; and its purpose is to offer a projection type liquid crystal display device that provides easy cooling of liquid crystal light valve, and above all, it provides a bright display screen with high utilization efficiency of lights of light source.

[Actions]

According to above-explained constitution of this invention, nonpolarized lights which are discharged from a light source device comprising a light source lamp and parabolic reflector enters dielectric multi-layer film within a polarized light separator, and is separated into two linear polarized lights showing mutually orthogonal relationship; and the one of such is utilized as it is. Furthermore, the other polarized light is reflected toward light source side; and after it is reflected at parabolic reflector, it is converged on a light source lamp. When surface of light emitting tube of light source lamp is treated in a frost form with concaves and convex (凹凸), polarized lights which are converged and are scattered become nonpolarized lights. And therefore, these nonpolarized lights are again reflected at the parabolic reflector in the same manner as the first nonpolarized lights which are discharged, and become almost parallel luminous flux, and enter polarized light separator and are separated as polarized lights in mutual orthogonal relationship. In addition, when a surface of light emitting tube of light source lamp happens to be smooth, and degree of polarization of converged lights which are transmitted happens to show hardly any changes, it is recommended to install a $1/4$ wavelength panel between light source device and polarized light separator. In this case, one of the polarized light that is reflected from a dielectric multi-layer films within said polarized light separator passes through $1/4$ wavelength panel and becomes circularly polarized light, and moves toward light source device side, and is reflected at parabolic reflector, and returns to the light source lamp. Furthermore, because this circularly polarized light becomes polarized light that is orthogonal to polarized light direction of the time when is reflected at polarized light separator for the first time after it is reflected at parabolic reflector again in the same manner as light source light, and then passes through $1/4$ wavelength panel once more, it passes through the polarized light separator. And therefore, almost all lights of light source are converted to linear polarized lights at the end.

[Examples]

Examples of this invention are explained below in reference with attached Figures.

Figure 1 illustrates a constitutional diagonal view that shows the first example of this invention's polarizing light source device. Luminous flux that is radiated from a light source lamp (101) (halogen lamp, metal halide lamp, or xenon lamp and the like) is reflected at parabolic reflector (102) and becomes almost parallel nonpolarized lights (105) and enter a polarized light separator that consists of a prism (103) and dielectric multi-layer films (104). Both two dielectric multi-layer films (104) show characteristics as such that they reflect s-polarized light over entire visible region and transmit p-polarized light; and in addition, because two dielectric multi-layer films (104) are in mutually orthogonal form, of the nonpolarized lights (105) which enter a polarized light separator, p-polarized light is all transmitted while s-polarized light is reflected at two dielectric multi-layer films (104), and returns to the light source side. As said reflected s-polarized lights (106) is of almost parallel lights, they are reflected at parabolic reflector (102), and return to the light source lamp (101). The surface of light emitting tube of light source lamp (101) is designed as a frost structure with concaves and convex; and therefore, polarization direction of the s-polarized lights which enter light source lamp (101) is disturbed and they become nonpolarized lights; and then, are radiated as lights of light source to repeat the same as explained previously. And therefore, as some of the s-polarized lights reflected from the polarized light separator are converted to p-polarized lights and are utilized, it provides high utilization efficiency of lights of light source.

Figure 3 illustrates a constitutional plane view of the second example of this invention's polarizing light source device. Nonpolarized lights (304) radiated from a light source lamp (101) (xenon lamp, metal halide lamp and the like) are reflected at parabolic reflector, and move toward polarized light separator side (303). Prior to entering the polarized light separator (303), the nonpolarized lights (304) pass through a $1/4$ wavelength panel; however, the nonpolarized lights (304) remain as nonpolarized lights even after passing. As explained previously, the polarized light separator (303) consists of mutually orthogonal dielectric multi-layer films and prism; and as each dielectric multi-layer film has characteristics of transmitting p-polarized light while reflecting s-polarized light, only the p-polarized light (305) of the nonpolarized lights (304) which enter from light source side is transmitted; and s-polarized light (306) is reflected twice and returns to light source side. At this time, it becomes circularly polarized light (307) by passing through $1/4$ wavelength panel; and is

[Examples]

Examples of this invention are explained below in reference with attached Figures.

Figure 1 illustrates a constitutional diagonal view that shows the first example of this invention's polarizing light source device. Luminous flux that is radiated from a light source lamp (101) (halogen lamp, metal halide lamp, or xenon lamp and the like) is reflected at parabolic reflector (102) and becomes almost parallel nonpolarized lights (105) and enter a polarized light separator that consists of a prism (103) and dielectric multi-layer films (104). Both two dielectric multi-layer films (104) show characteristics as such that they reflect s-polarized light over entire visible region and transmit p-polarized light; and in addition, because two dielectric multi-layer films (104) are in mutually orthogonal form, of the nonpolarized lights (105) which enter a polarized light separator, p-polarized light is all transmitted while s-polarized light is reflected at two dielectric multi-layer films (104), and returns to the light source side. As said reflected s-polarized lights (106) is of almost parallel lights, they are reflected at parabolic reflector (102), and return to the light source lamp (101). The surface of light emitting tube of light source lamp (101) is designed as a frost structure with concaves and convex; and therefore, polarization direction of the s-polarized lights which enter light source lamp (101) is disturbed and they become nonpolarized lights; and then, are radiated as lights of light source to repeat the same as explained previously. And therefore, as some of the s-polarized lights reflected from the polarized light separator are converted to p-polarized lights and are utilized, it provides high utilization efficiency of lights of light source.

Figure 3 illustrates a constitutional plane view of the second example of this invention's polarizing light source device. Nonpolarized lights (304) radiated from a light source lamp (101) (xenon lamp, metal halide lamp and the like) are reflected at parabolic reflector, and move toward polarized light separator side (303). Prior to entering the polarized light separator (303), the nonpolarized lights (304) pass through a $1/4$ wavelength panel; however, the nonpolarized lights (304) remain as nonpolarized lights even after passing. As explained previously, the polarized light separator (303) consists of mutually orthogonal dielectric multi-layer films and prism; and as each dielectric multi-

layer film is designed as a dielectric multi-layer film, light (306) is reflected twice and returns to light source side. At this time, it becomes circularly polarized light (307) by passing through $1/4$ wavelength panel; and is

[Actions]

According to above-explained constitution of this invention, nonpolarized lights which are discharged from a light source device comprising a light source lamp and parabolic reflector enters dielectric multi-layer film within a polarized light separator, and is separated into two linear polarized lights showing mutually orthogonal relationship; and the one of such is utilized as it is. Furthermore, the other polarized light is reflected toward light source side; and after it is reflected at parabolic reflector, it is converged on a light source lamp. When surface of light emitting tube of light source lamp is treated in a frost form with concaves and convex (凹凸), polarized lights which are converged and are scattered become nonpolarized lights. And therefore, these nonpolarized lights are again reflected at the parabolic reflector in the same manner as the first nonpolarized lights which are discharged, and become almost parallel luminous flux, and enter polarized light separator and are separated as polarized lights in mutual orthogonal relationship. In addition, when a surface of light emitting tube of light source lamp happens to be smooth, and degree of polarization of converged lights which are transmitted happens to show hardly any changes, it is recommended to install a $1/4$ wavelength panel between light source device and polarized light separator. In this case, one of the polarized light that is reflected from a dielectric multi-layer films within said polarized light separator passes through $1/4$ wavelength panel and becomes circularly polarized light, and moves toward light source device side, and is reflected at parabolic reflector, and returns to the light source lamp. Furthermore, because this circularly polarized light becomes polarized light that is orthogonal to polarized light direction of the time when is reflected at polarized light separator for the first time after it is reflected at parabolic reflector again in the same manner as light source light, and then passes through $1/4$ wavelength panel once more, it passes through the polarized light separator. And therefore, almost all lights of light source are converted to linear polarized lights at the end.

reflected at parabolic reflector (102) and becomes reversal circularly polarized light (308) and returns to the light source lamp. As light emitting tube of light source lamp (101) is made of a clear glass material, circularly polarized light (308) passes through light source lamp while retaining its polarization characteristics as they are. Then, the circularly polarized light (308) that exits light source lamp (101) again is reflected at parabolic reflector (102), and again becomes reversal circularly polarized light (309). Then, it passes through $1/4$ wavelength panel (301), and becomes linear polarized light (310); however, as the main sectional planes of this $1/4$ wavelength panel (301) and $1/4$ wavelength panel (302) are mutually in orthogonal relationship, linear polarized light (310) is the p-polarized light to the dielectric multi-layer films, and it passes through said polarized light separator. And therefore, almost all the nonpolarized lights (304) which enter polarized light separator are converted to linear polarized lights.

Figure 4 illustrates a constitutional plane view of projection type liquid crystal display device that is constructed by using this invention's polarizing light source device. Almost all nonpolarized lights (408) from a light source device comprising light source lamp (101) and parabolic reflector (102) are converted to linear polarized lights by $1/4$ wavelength panel (401) and polarized light separator (402). Although 6 dielectric multi-layer films are used in order to reduce the thickness of polarized light separator in this polarizing light source device, it is of the same principles as shown in the Figure 3 that allows transmission of p-polarized light and reflection of s-polarized light. The linear polarized lights (409) discharged from polarizing light source device show angle dependence to the polarized light separator (402) and nonpolarized lights from the light source device are not the perfect parallel lights; and therefore, that degree of polarization remains insufficient to enter the liquid crystal panel (404), and show reduced contrast ratio of display screen as they are. And therefore, they are passed through polarization panel (403) to set to linear polarized lights with high degree of polarization. The luminous flux that enters this polarization panel (403) hardly includes s-polarized light varying from the nonpolarized lights (207) which enter the polarization panel (202) of the case of conventional projection type liquid crystal display device shown in the Figure 2; and therefore, polarization

characteristics of polarization panel (403) are not so good as the case. And therefore, as it is possible to utilize a polarization panel with poor polarization characteristics, that is to say, the one that shows high overall

transmissivity, it provides high utilization efficiency of luminous flux. In addition, as luminous flux that is absorbed in the polarization panel (403) is fairly small, temperature rise on polarization panel (403) hardly occurs, and does not require an installation of cooling fan. The linear polarized lights which pass through polarization panel (403) are modulated at liquid panel (404), and then, they are detected at the polarization panel (405), and are enlarged and projected with lens (406), and are input to the liquid crystal panel (404) to form a projected image on a screen (407). Although this case illustrates monochrome constitution, it is possible to display a colored projected image through arrangement of colored light separator with dichromic mirror between polarized light separator (402) and polarization panel (403) to separate to three primary colors, and then, after modulating each luminous flux with light valve, modulated lights of three primary colors may be synthesized by a dichromic mirror, and are enlarged and projected through a lens.

[Effects of this invention]

According to this invention explained above, effects of fairly high utilization efficiency of lights of light source and brighter display screen and easy cooling of light valve may be attained through use of polarizing light source device that utilizes one of the two linear polarized lights, which are in mutual orthogonal relationship and are included in nonpolarized lights from a light source of light source device of projection type liquid crystal display device, is returned to the light source lamp once, and then, some of such light is converted to the polarized light that is same as the other linear polarized light. In addition, because linear polarized light with fairly high degree of polarization enters polarization panel at luminous flux incidental side of liquid crystal light valve, it is possible to use such polarization panel showing fairly poor polarization characteristics, in other words, the one showing high overall transmissivity.

BRIEF EXPLANATION OF THE FIGURES

Figure 1 illustrates a constitutional diagonal view of first example of this invention's polarizing light source device.

Figure 2 illustrates a constitutional diagonal view that shows a constitution of conventional projection type liquid crystal display device.

Figure 3 shows a constitutional plane view of second example of this invention's polarizing light source device.

transmissivity, it provides high utilization efficiency of luminous flux. In addition, as luminous flux that is absorbed in the polarization panel (403) is fairly small, temperature rise on polarization panel (403) hardly occurs, and does not require an installation of cooling fan. The linear polarized lights which pass through polarization panel (403) are modulated at liquid panel (404), and then, they are detected at the polarization panel (405), and are enlarged and projected with lens (406), and are input to the liquid crystal panel (404) to form a projected image on a screen (407). Although this case illustrates monochrome constitution, it is possible to display a colored projected image through arrangement of colored light separator with dichromic mirror between polarized light separator (402) and polarization panel (403) to separate to three primary colors, and then, after modulating each luminous flux with light valve, modulated lights of three primary colors may be synthesized by a dichromic mirror, and are enlarged and projected through a lens.

[Effects of this invention]

According to this invention explained above, effects of fairly high utilization efficiency of lights of light source and brighter display screen and easy cooling of light valve may be attained through use of polarizing light source device that utilizes one of the two linear polarized lights, which are in mutual orthogonal relationship and are included in nonpolarized lights from a light source of light source device of projection type liquid crystal display device, is returned to the light source lamp once, and then, some of such light is converted to the polarized light that is same as the other linear polarized light. In addition, because linear polarized light with fairly high degree of polarization enters polarization panel at luminous flux incidental side of liquid crystal light valve, it is possible to use such polarization panel showing fairly poor polarization characteristics, in other words, the one showing high overall transmissivity.

BRIEF EXPLANATION OF THE FIGURES

Figure 1 illustrates a constitutional diagonal view of first example of this invention's polarizing light source device.


Figure 2 illustrates a constitutional diagonal view that shows a constitution of conventional projection type liquid crystal display device.

reflected at parabolic reflector (102) and becomes reversal circularly polarized light (308) and returns to the light source lamp. As light emitting tube of light source lamp (101) is made of a clear glass material, circularly polarized light (308) passes through light source lamp while retaining its polarization characteristics as they are. Then, the circularly polarized light (308) that exits light source lamp (101) again is reflected at parabolic reflector (102), and again becomes reversal circularly polarized light (309). Then, it passes through $1/4$ wavelength panel (301), and becomes linear polarized light (310); however, as the main sectional planes of this $1/4$ wavelength panel (301) and $1/4$ wavelength panel (302) are mutually in orthogonal relationship, linear polarized light (310) is the p-polarized light to the dielectric multi-layer films, and it passes through said polarized light separator. And therefore, almost all the nonpolarized lights (304) which enter polarized light separator are converted to linear polarized lights.


Figure 4 illustrates a constitutional plane view of projection type liquid crystal display device that is constructed by using this invention's polarizing light source device. Almost all nonpolarized lights (408) from a light source device comprising light source lamp (101) and parabolic reflector (102) are converted to linear polarized lights by $1/4$ wavelength panel (401) and polarized light separator (402). Although 6 dielectric multi-layer films are used in order to reduce the thickness of polarized light separator in this polarizing light source device, it is of the same principles as shown in the Figure 3 that allows transmission of p-polarized light and reflection of s-polarized light. The linear polarized lights (409) discharged from polarizing light source device show angle dependence to the polarized light separator (402) and nonpolarized lights from the light source device are not the perfect parallel lights; and therefore, that degree of polarization remains insufficient to enter the liquid crystal panel (404), and show reduced contrast ratio of display screen as they are. And therefore, they are passed through polarization panel (403) to set to linear polarized lights with high degree of polarization. The luminous flux that enters this polarization panel (403) hardly includes s-polarized light varying from the nonpolarized lights (207) which enter the polarization panel (202) of the case of conventional projection type liquid crystal display device shown in the Figure 2; and therefore, polarization characteristics of this polarization panel (403) show somewhat better degree of polarization of transmitted lights even though they may be inferior to the polarization characteristics of polarization panel (202) of conventional case. And therefore, as it is possible to utilize a polarization panel with poor polarization characteristics, that is to say, the one that shows high overall

Figure 4 illustrates a constitutional plane view of projection type liquid crystal display device that is constructed by using this invention's polarizing light source device.


- 101... light source lamp
- 102... parabolic reflector
- 103... prism
- 104... dielectric multi-layer film
- 105... nonpolarized light
- 107... linear polarized light
- 202... polarization panel
- 204... liquid crystal panel
- 206... projection lens
- 301... 1/4 wavelength panel
- 303... polarized light separator
- 307... circularly polarized light
- 407... screen

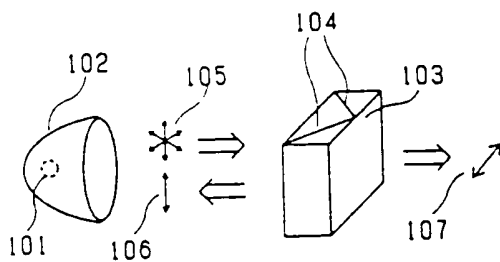


第1図

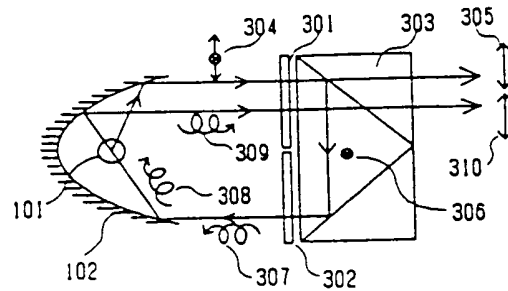

第3図

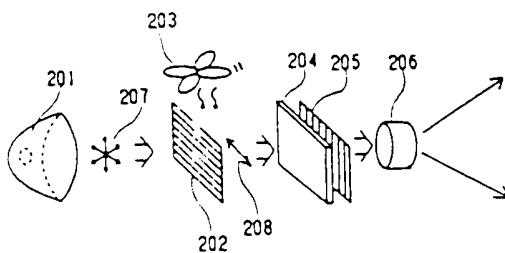

第2図

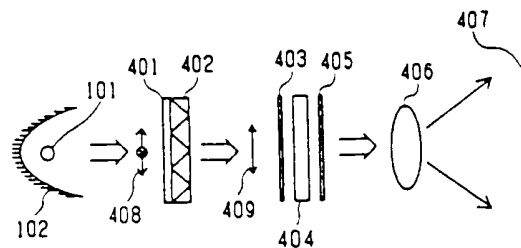

第4図

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

553

554

555

556

557

558

559

560

561

562

563

564

565

566

567

568

569

570

571

572

573

574

575

576

577

578

579

580

581

582

583

584

585

586

587

588

589

590

591

592

593

594

595

596

597

598

599

600

601

602

603

604

605

606

607

608

609

610

611

612

613

614

615

616

617

618

619

620

621

622

623

624

625

626

627

628

629

630

631

632

633

634

635

636

637

638

639

640

641

642

643

644

645

646

647

648

649

650

651

652

653

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

669

670

671

672

673

674

675

676

677

678

679

680

681

682

683

684

685

686

687

688

689

690

691

692

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707

708

709

710

711

712

713

714

715

716

717

718

719

720

721

722

723

724

725

726

727

728

729

730

731

732

733

734

735

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

802

803

804

805

806

807

808

809

810

811

812

813

814

815

816

817

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859

860

861

862

863

864

865

866

867

868

869

870

871

872

873

874

875

876

877

878

879

880

881

882

883

884

885

886

887

888

889

890

891

892

893

894

895

896

897

898

899

900

901

902

903

904

905

906

907

908

909

910

911

912

913

914

915

916

917

918

919

920

921

922

923

924

925

926

927

928

929

930

931

932

933

934

935

936

937

938

939

940

941

942

943

944

945

946

947

948

949

950

951

952

953

954

955

956

957

958

959

960

961

962

963

964

965

966

967

968

969

970

971

972

973

974

975

976

977

978

979

980

981

982

983

984

985

986

987

988

989

990

991

992

993

994

995

996

997

998

999

1000